

CoeLux® LS MATTE

Datasheet / pg 1 of 2

CoeLux® LS MATTE can be installed as a single unit, as a modular system, or aligned in order to design hallways of light able to deliver depth or visual patterns.


The sun reflected on the matte white frame creates a 45-degree beam of light which delivers extreme visual comfort to the viewer in the room, allowing them to fully experience it. CoeLux® LS MATTE is ideal for restaurants, shops and public spaces.

CoeLux® LS is DALI compatible allowing easy integration into a control system.


Warranty period: 2 years.



Technical drawings:

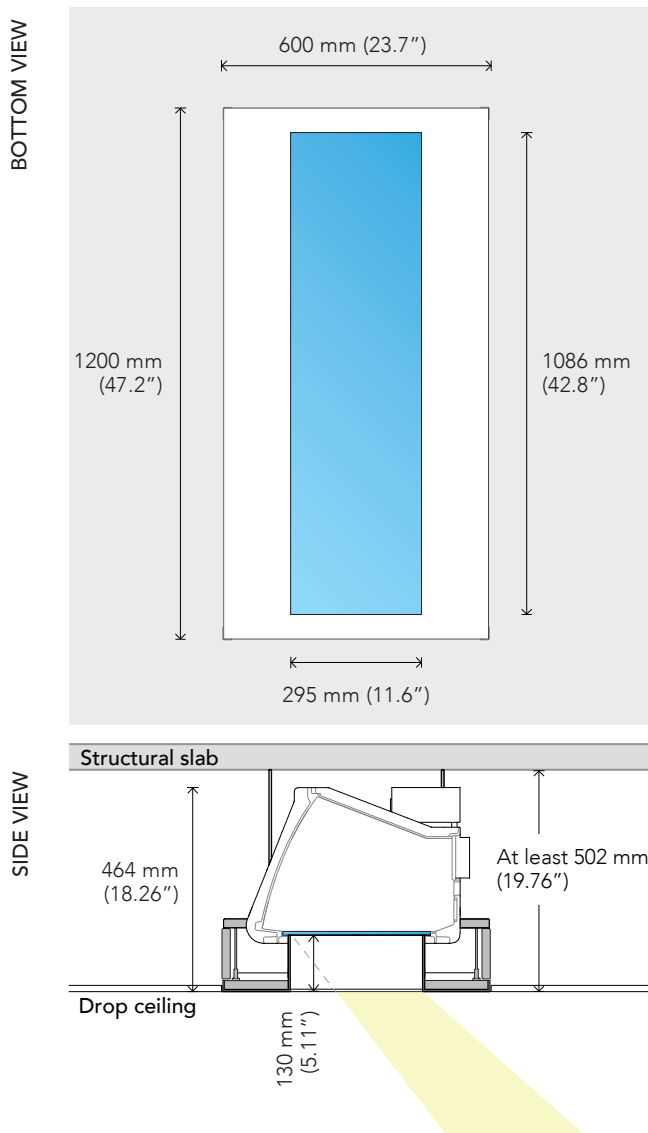

Photometric curves:

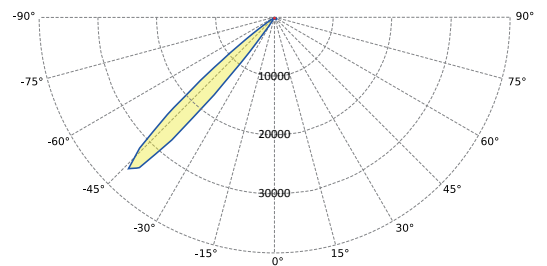

Profile units are
— C0 - 180
— C90 - C270
*cd

Technical informations:

DEVICE DIMENSIONS	1200 x 600 x 465 mm	47.2 x 23.6 x 18.3"
SKY-LIGHT SIZE	1086 x 295 mm	42.7 x 11.6"
WEIGHT	30 kg	66 lb

Performance informations:

TYPE OF SOURCE	LED dimmable
POWER INPUT	100-240 V~ 50/60 Hz
MAX POWER CONSUMPTION	100 W
TYPICAL POWER CONSUMPTION	90 W
TOTAL LIGHT OUTPUT	3300 lm
LUMEN MAINTENANCE	LM70 >50000 h

Environmental informations:

Equipment intended for internal use

MIN. / MAX. OPERATING TEMPERATURE -10°C / 40°C

MAX. OPERATING RELATIVE HUMIDITY 95% (non-condensing)

CERTIFIED



> CoeLux® LS MATTE

